Large Angle Flexure for Oscillating Heat Pipes in Space

Department of Mechanical Engineering:

California State University, Los Angeles

Senior Design Members: Spencer Miesner, Anthony De Leon, Sufi Asadi, Allan Hernandez, Christopher Molina

Advisor: Dr. Jim Kuo, Cal State LA

Liaison: Dr. Scott Roberts, JPL

Partner: NASA, Jet Propulsion Laboratory


Agenda


I. Introduction
   I. Background (Spencer)
   II. Summary of Problem (Spencer)
   III. Objective (Spencer)
   IV. Minimum Requirements Table (Anthony)
II. Design Showcase (All)
III. Testing Overview (Chris)
   I. Overview of 3D Printing Flexures (Chris)
   II. Experimental Procedure (Chris)
   III. Simulation Procedure (Allan)
IV. Trade Study (Sufi)
V. Final Design Evaluation (Sufi)
VI. What's next for Large Angle Flexures (Anthony)



Background


- Project is part of an effort to develop and improve CubeSats
- CubeSats are miniature satellites used for space research
- Internal components generate heat (which is detrimental to performance)
- Cooling done by radiating heat into space

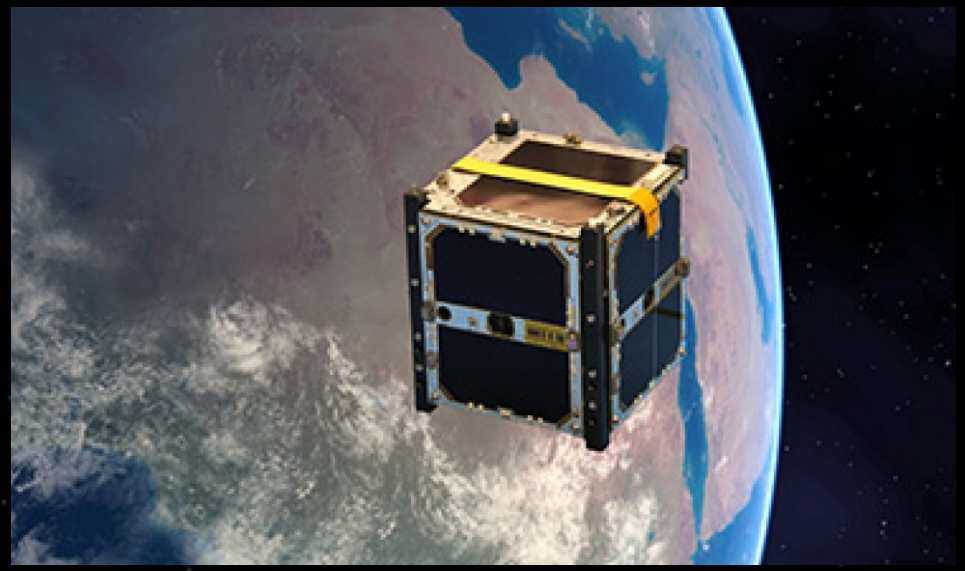


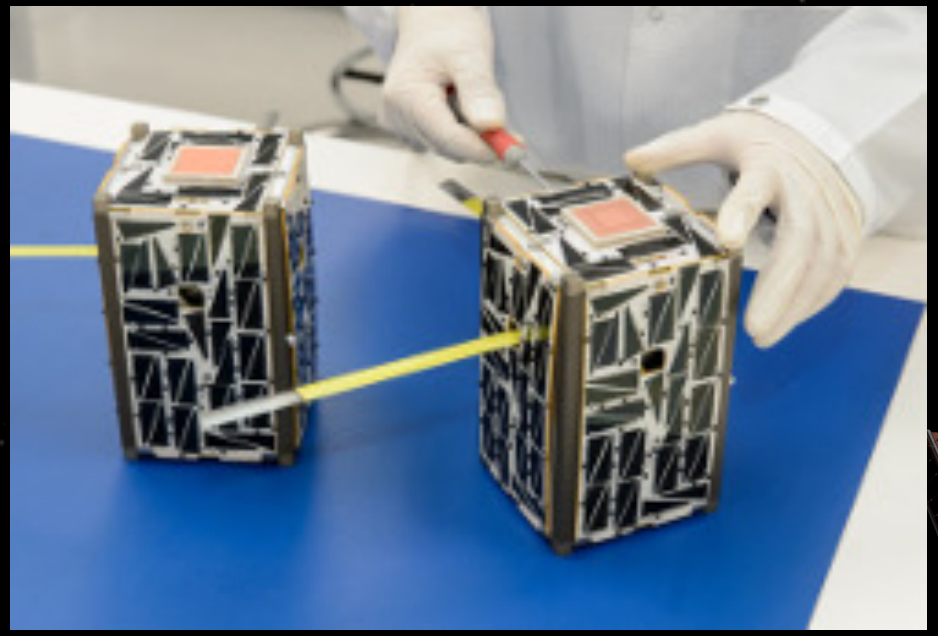


Summary of Problem

- Current cooling technologies in CubeSats limit power usage
- CubeSats have limited surface area. Use deployable radiator to increase area
- Difficulties in transferring heat across mechanical hinges
- Heat pipes transfer heat via fluid flow

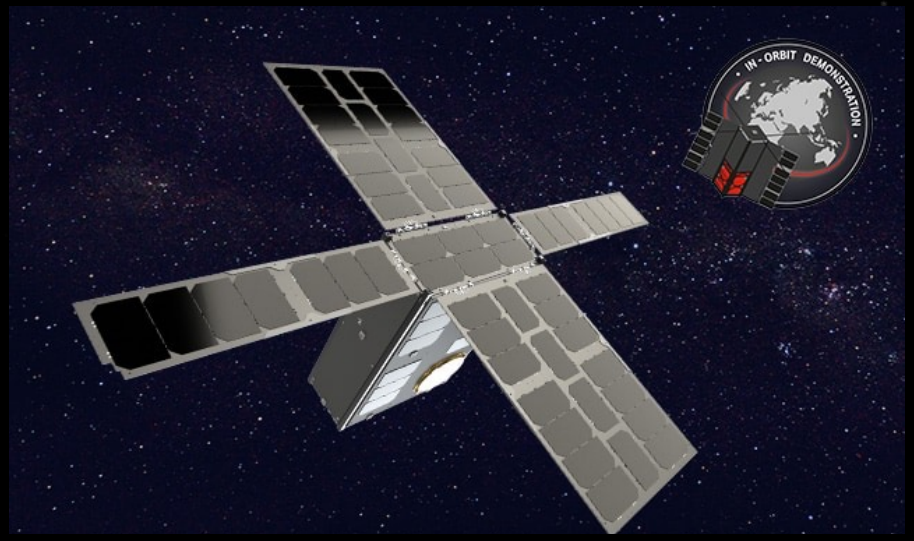


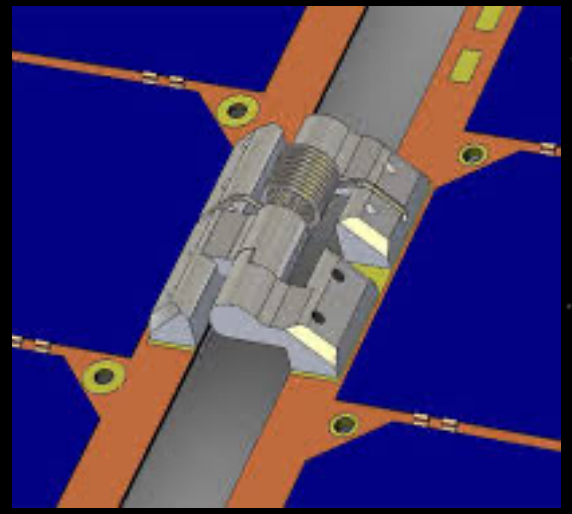

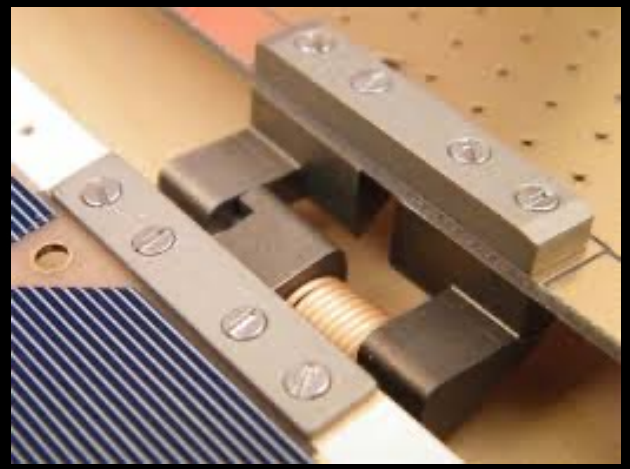

Summary of Problem

- Oscillating Heat Pipes (OHP) are a 2-phase flow device
- Uses an oscillatory motion to transfer heat from evaporator to condenser
- High thermal conductivity, but requires flexible joints

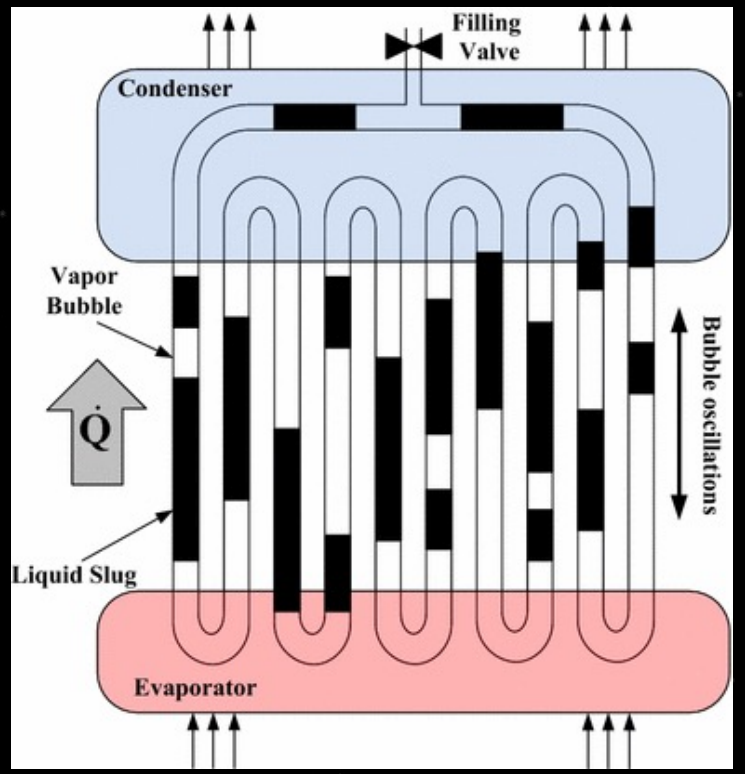


Objective


How can we create a flexure that can:

- Bend to allow radiator to be in stowed position
- Allow fluid to flow through
- Be 3D printed in metal

Open Position

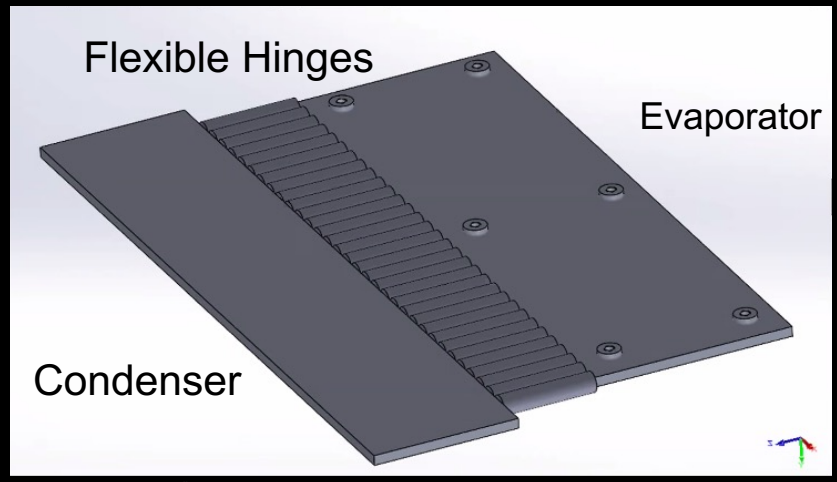


Stowed Position

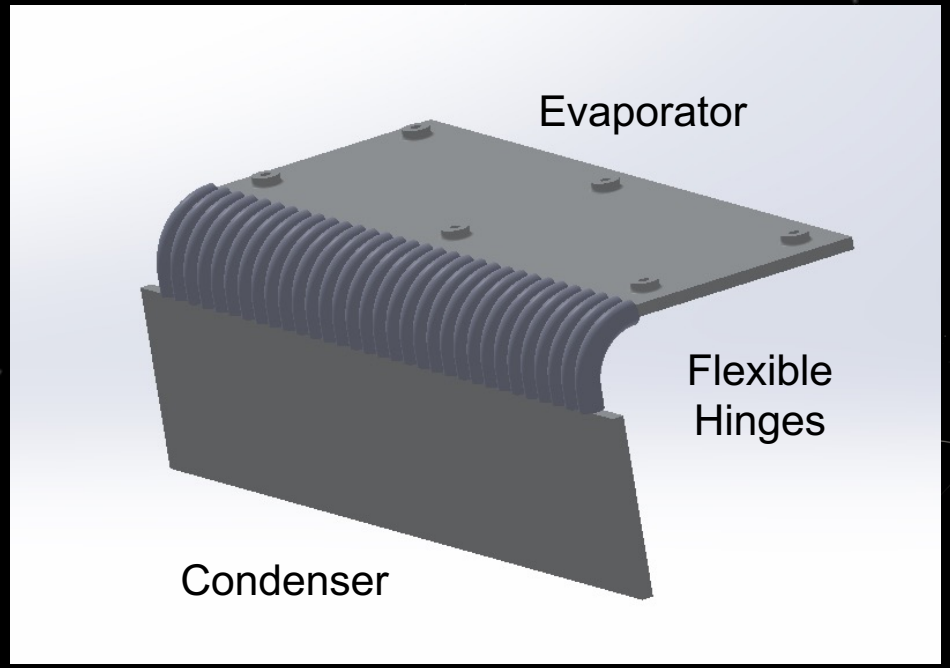


Minimum Requirements Table

Requirement	Minimum Requirement
Flexibility	Be able to bend to put radiator in stowed position
Strength	Have a Factor of Safety of at least 2.0
Coiled Length	Have a maximum length of 8 cm
Uncoiled Length	Efficient fitting of length in volumetric space
Width	Have a maximum width of 8 mm
Height	Have a maximum height of 8 mm
Mass	Have a maximum mass of 2.5 g
Manufacturability	Able to be 3D printed in metal though Powder Bed Fusion




Serpentine Structure

Previous Designs:

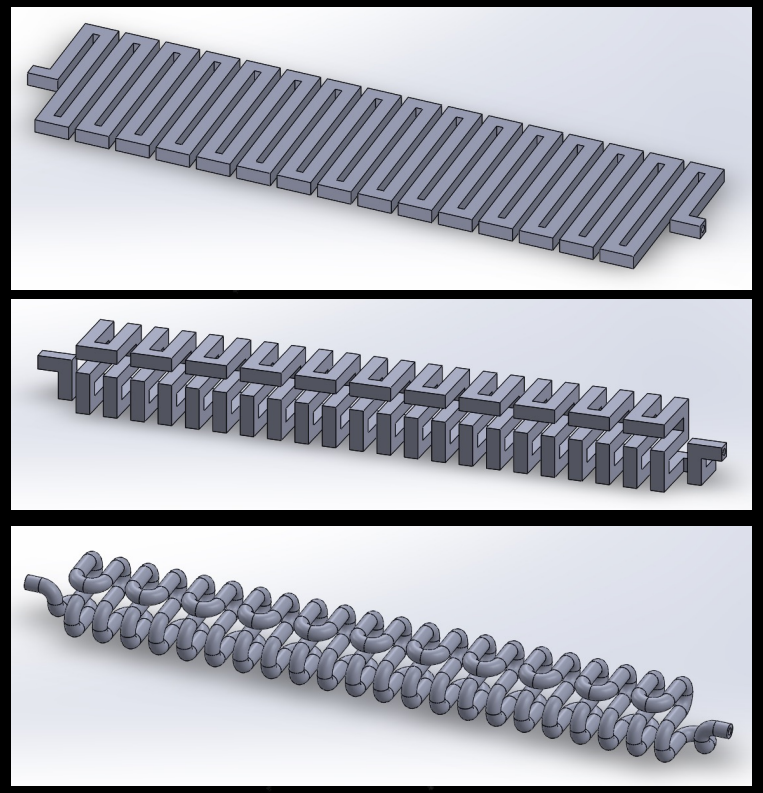


Final Design:

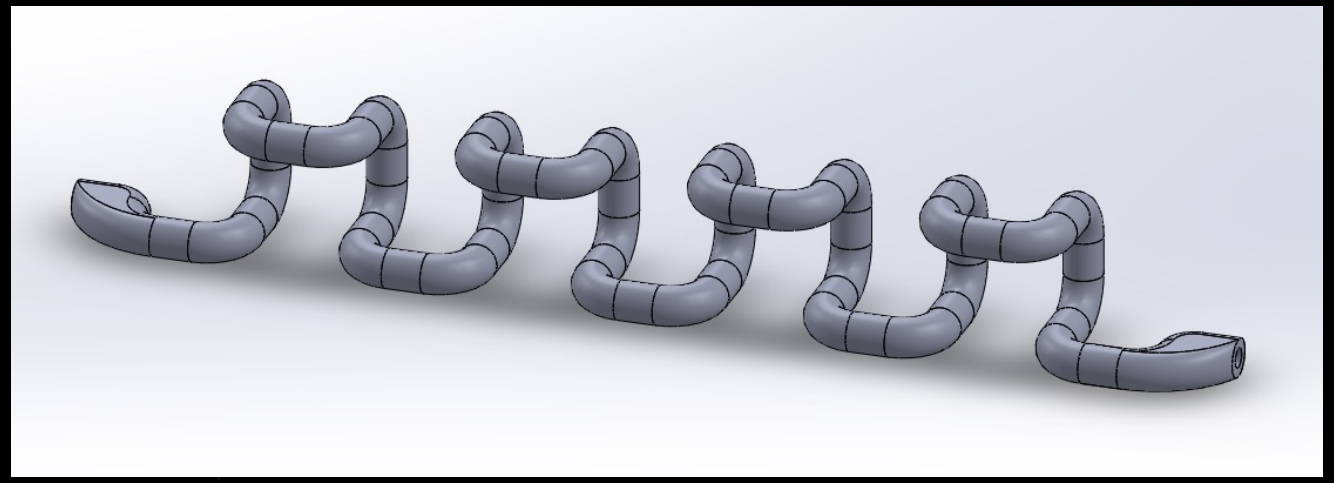


- Commonly used in MEMS (Micro Electro-Mechanical Structures) as flexures
- Lots of freedom of design
- Lots of room for optimization, through changing of different dimensions


Circle with inner Ellipse Spring

Previous Designs:

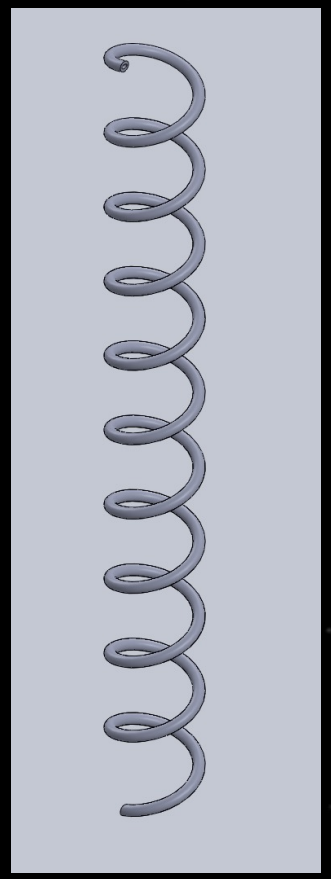

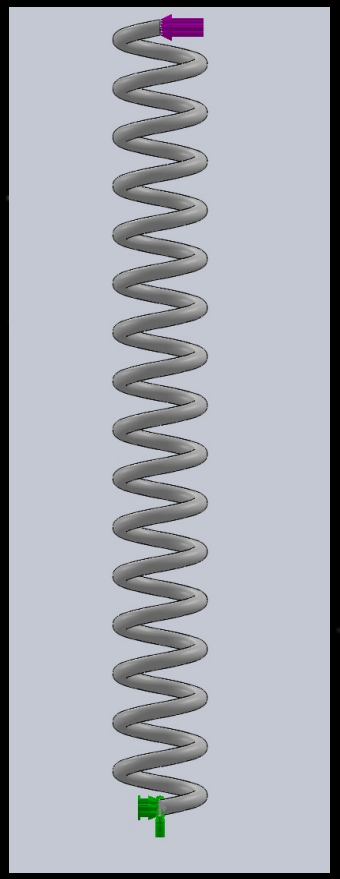


Final Design:

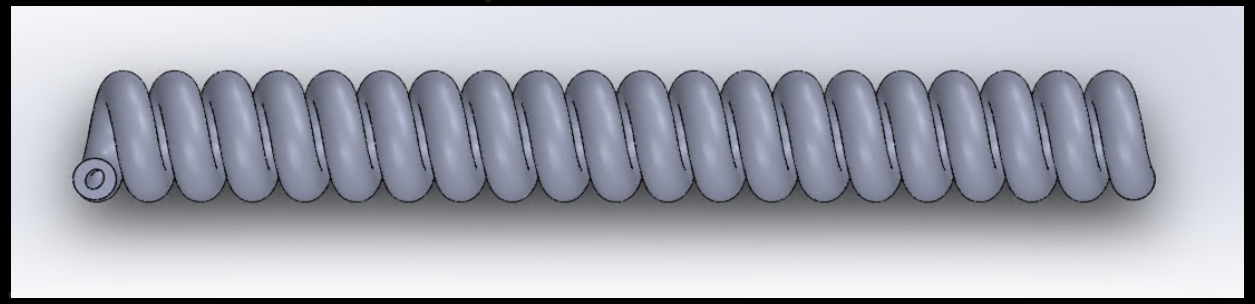



- Thicker walls can help with strength due to ellipse having less area than circle
- More angles increases the deflection, and circle has the most angles for outer
- Most amount of engaging due to not having sharp edges

Hexagon Spring

- Findings
  - ↑ turns, ↑ flexibility
  - σ_{max} near fixed end at corner
  - Failure usually occurred at σ_{max} location
- Improvements:
  - Modified # of turns
    - Increased pitch
  - Filet edges on spring and wire

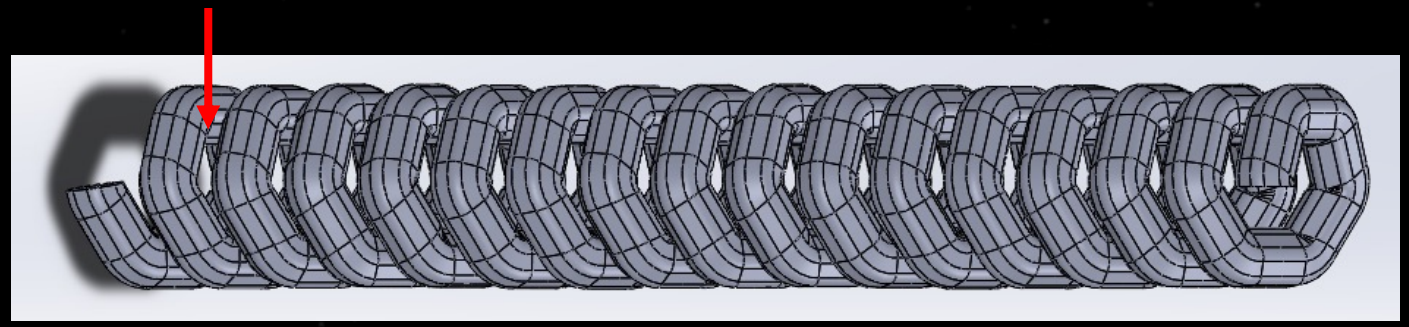


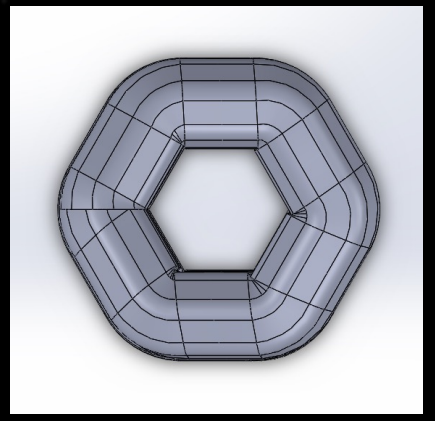

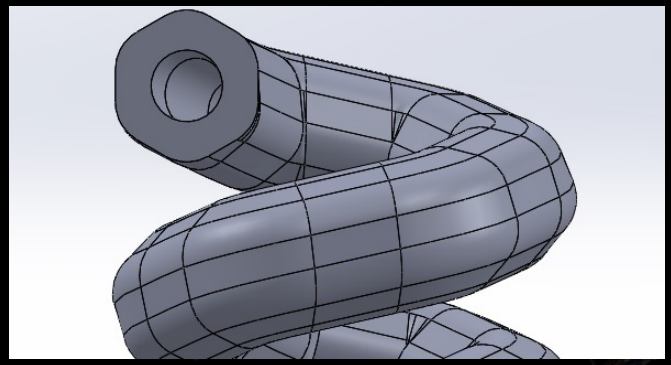


Reverse Hourglass Spring


Previous Designs:

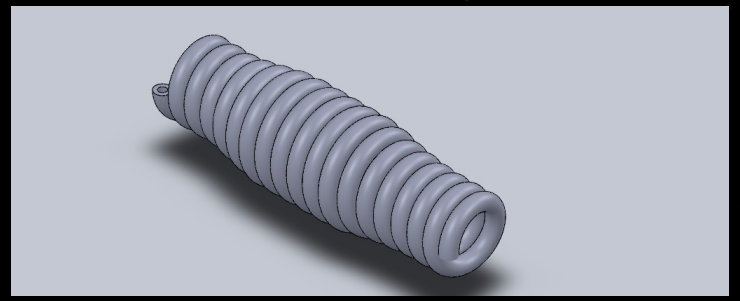

1st iteration

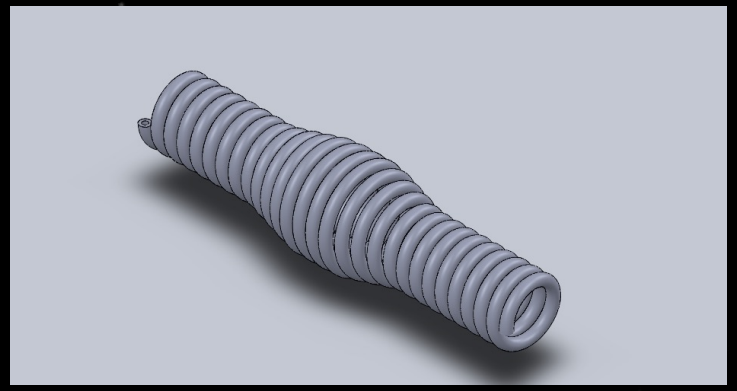

2nd iteration

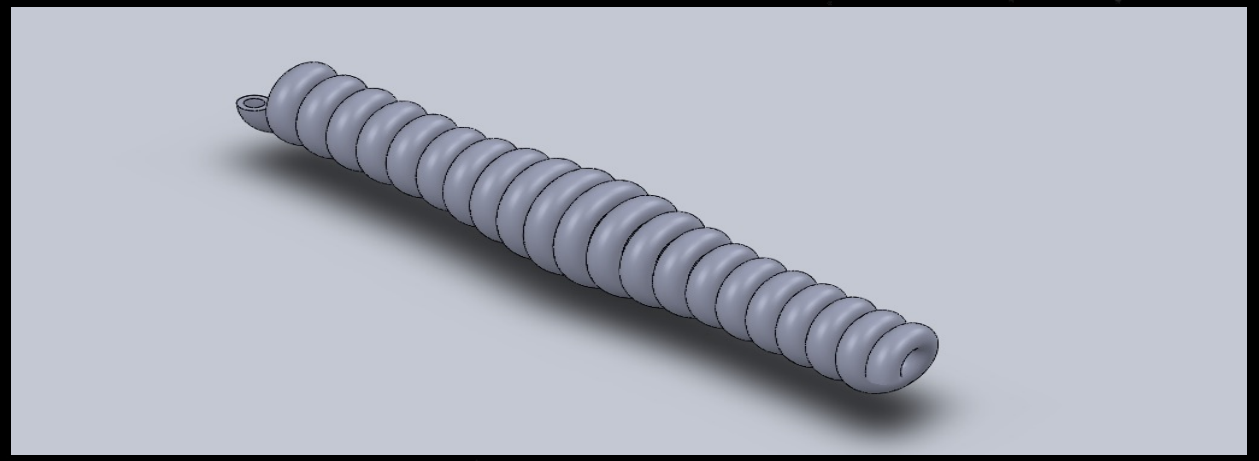



Final Design


- Alternate Design for Helical Compression Spring
  - Results can be compared to a typical helical spring
  - Change of centered height will diminish stress at edges
- Improvements:
  - Optimized length at the edges and decreasing the slope to the center height

Variable Pitch Spring


Previous Designs:

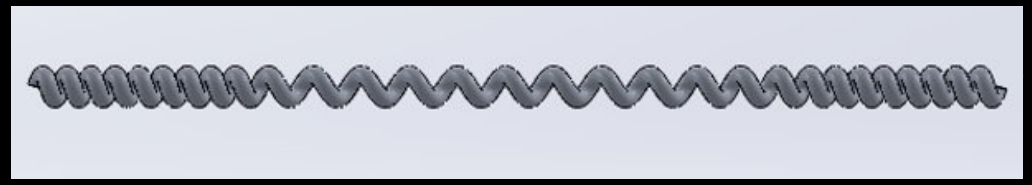

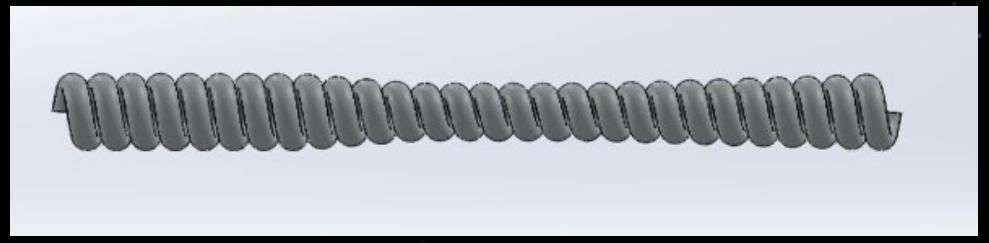

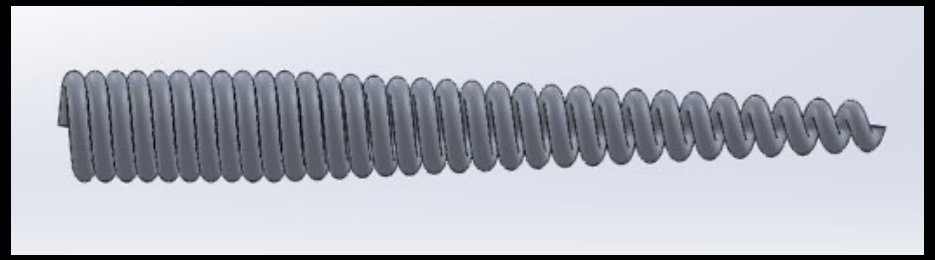


Final Design:

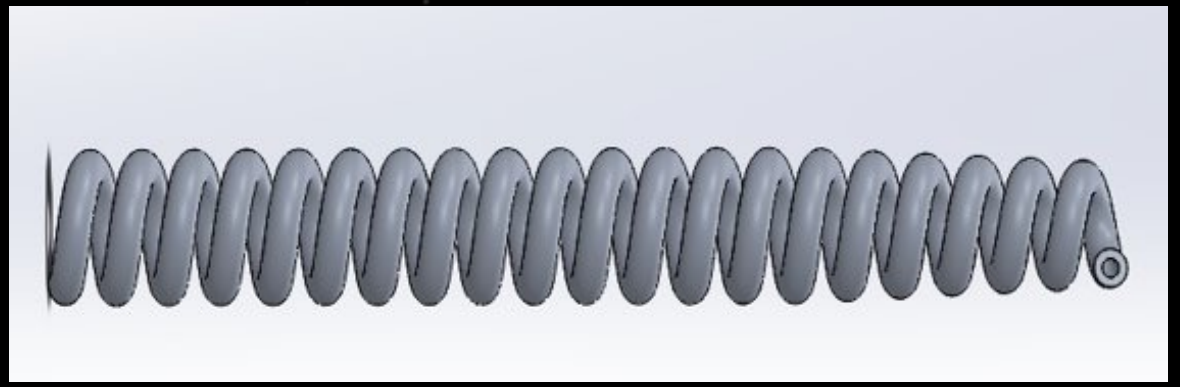


- Classic helical design but explored an important optimization technique
- Larger pitch toward the fixed end where more support is needed
- Smaller pitch toward free end where more bend activation is needed

Testing Overview


- Methods of testing:
  - Experimental Testing of 3D Printed PLA Flexures
  - Finite Element Analysis (FEA) Simulations
- Experimental testing in scaled PLA used to validate PLA FEA simulations
- Aluminum FEA Simulations then to describe flexure

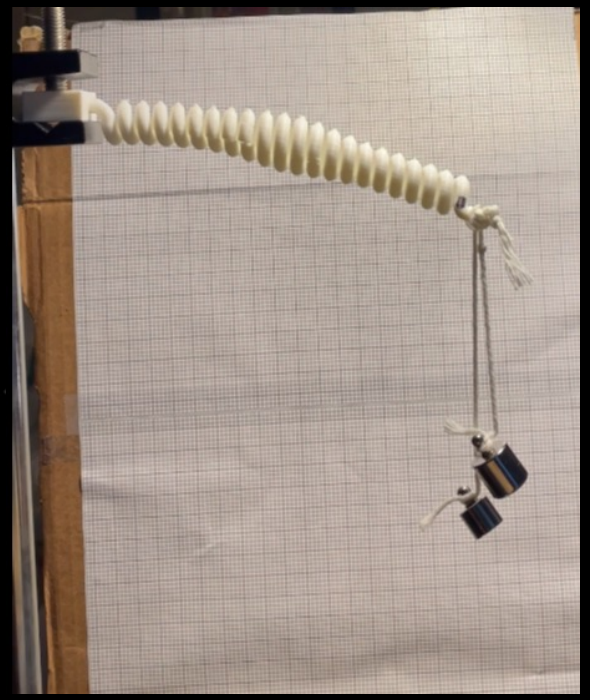

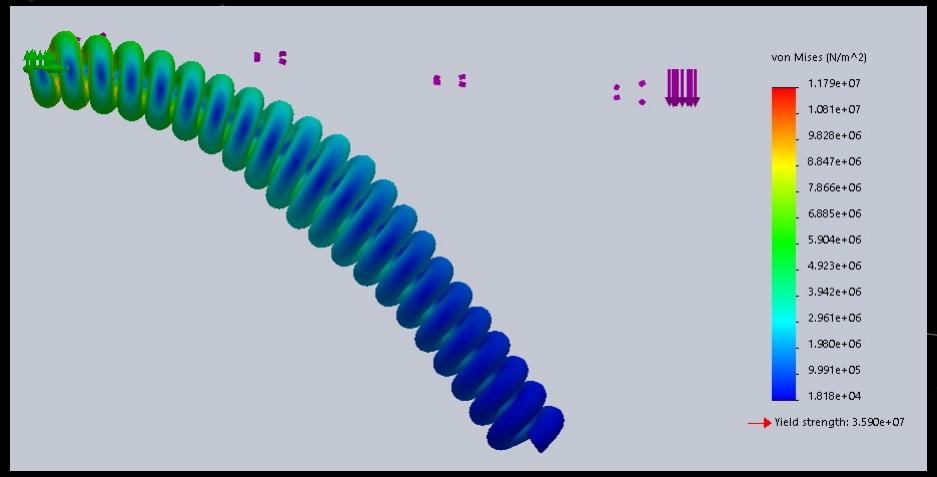


Overview of 3D Printing Flexures


- Final Flexure to be printed in metal (powder bed fusion)
- Flexures for experimental testing done with home PLA 3D printers
- Challenge to print small flexures with detail and little to no imperfections

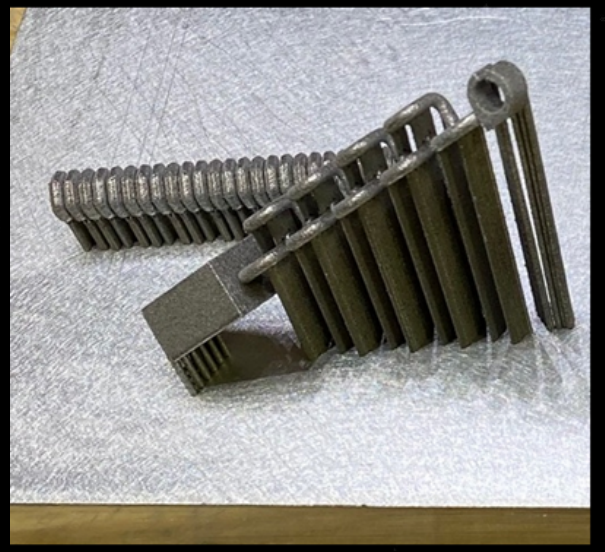



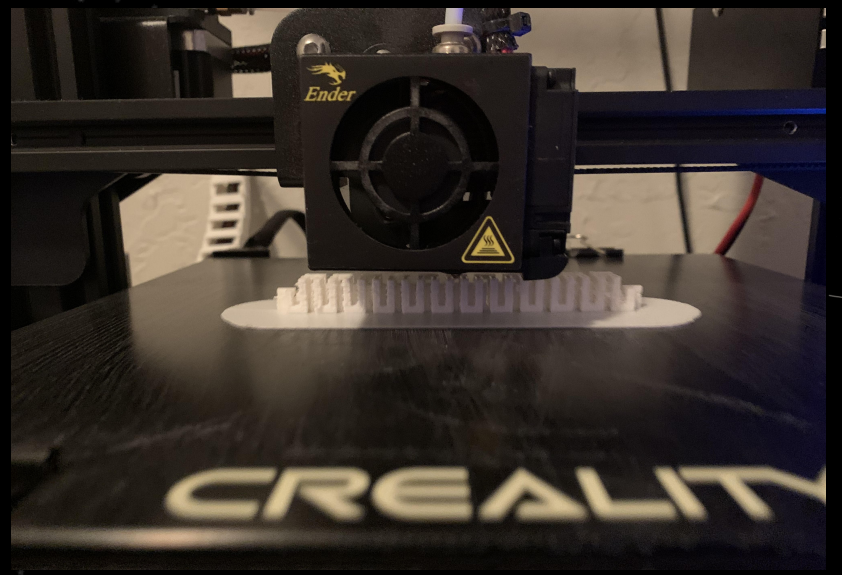



Experimental Procedure



Simulation Procedure

- Performed in ANSYS or SOLIDWORKS
- Mesh sensitivity tests determined mesh size
- Fixed face on one end and applied-force on opposite face
- Large-deflection setting was used
- Force applied in increments
- Acquired Von-Mises Stress and Angle of Deflection

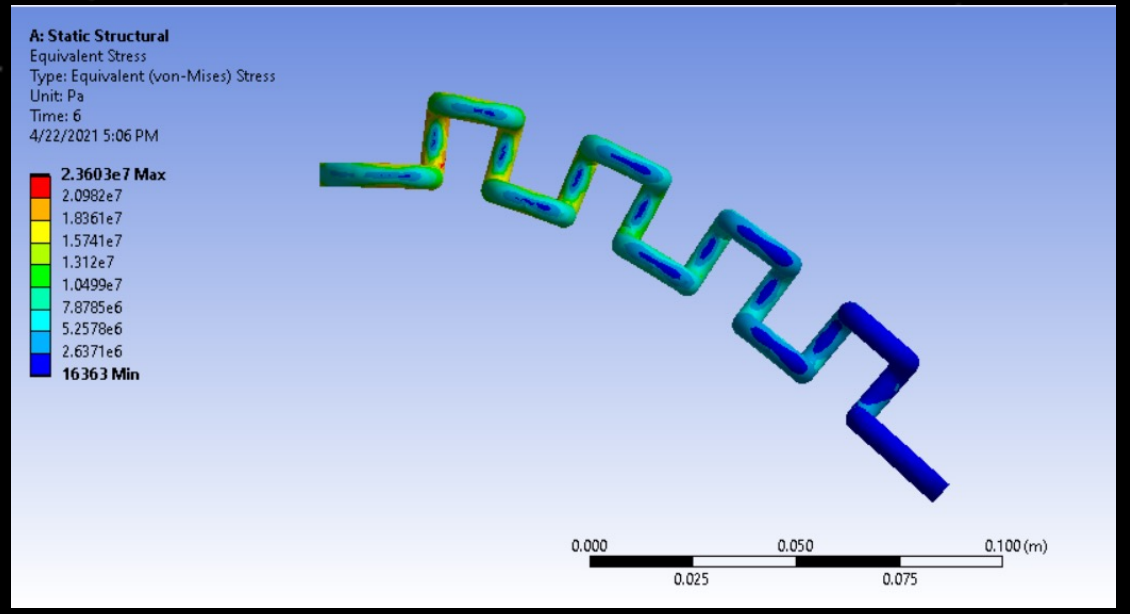

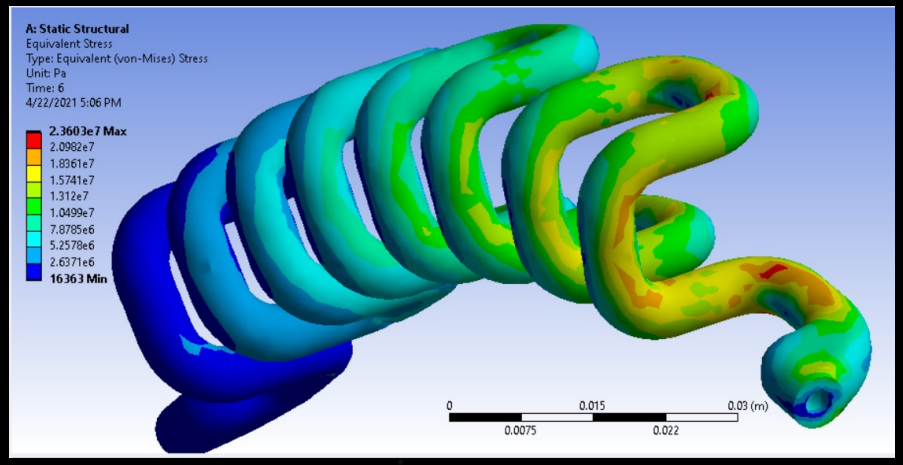


Trade Study

Categories	Importance	Serpentine	Spring with Circle and Ellipse	Variable Pitch Spring	Reverse Hourglass Spring	Helical Hexagonal Spring
Flexibility	0.19	3	1	3	3	1
Strength	0.19	2	1	2	2	1
Coiled Length (mm)	0.09	3	1	1	2	2
Uncoiled Length (mm)	0.14	1	3	2	3	1
Width	0.10	1	2	2	2	2
Height	0.05	1	2	2	2	2
Mass	0.10	3	1	1	2	3
Manufacturability	0.14	3	1	1	1	1
Total Point Weight	1.00	2.23	1.43	1.86	2.19	1.44

Final Design Evaluation

Requirement	Minimum Requirement	Final Design Performance
Flexibility	Be able to deploy a radiator from a stowed position	Flexes up to 24.19° which is not enough for full bend
Strength	Have a Factor of Safety of at least 2	Factor of Safety of 0.27 for full bend or 0.54 for halfway bend
Coiled Length	Have a maximum length of 8 cm	Coiled Length is 6 cm
Uncoiled Length	Efficient fitting of length in volumetric space	Uncoiled Length was about 180 mm which is low
Width	Have a maximum width of 8 mm	Width was 8 mm
Height	Have a maximum height of 8 mm	Height was 8 mm
Mass	Have a maximum mass of 2.5 g	Mass was 1.14 g
Manufacturability	Able to be 3D printed in metal though Powder Bed Fusion	Able to be printed with small adjustments



What's Next for Large Angle Flexures?

- Test metal printed flexures for further result validation
- Further optimize designs to increase FOS
- Design support structure to allow flexure to sustain larger forces for more bend

